


chilisleep™

# INSTRUCTION MANUAL


Your guide to our  
chiliPAD™ + chiliBLANKET™

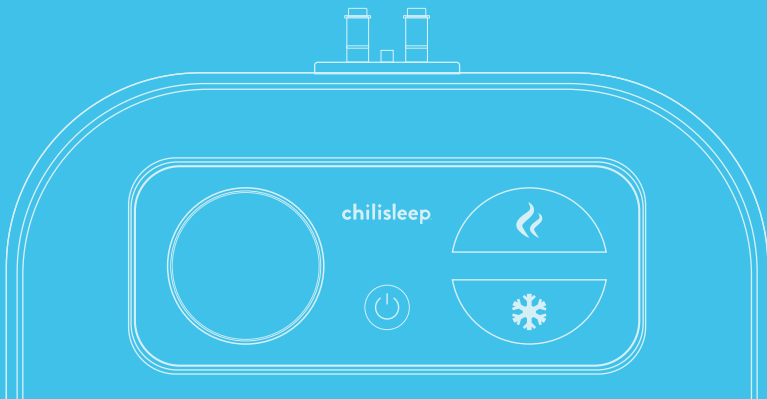

# GETTING STARTED


## 1. UNBOX AND PLACE ON FLAT SURFACE

Remove the blanket from the drawstring bag and place on a flat surface.

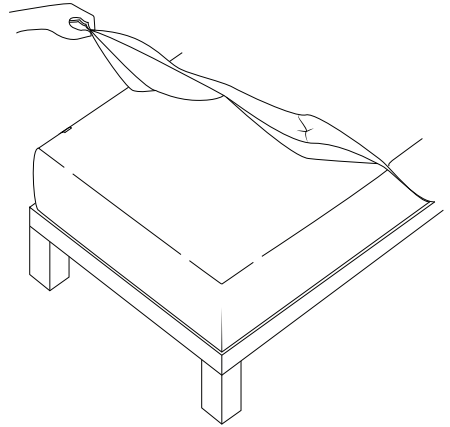


## 2. CONNECT TUBE TO THE BLANKET

Locate the connector tucked inside the blanket, near the branded loop label. Connect one end of the insulated tube to the blanket. It will 'click' when connected.

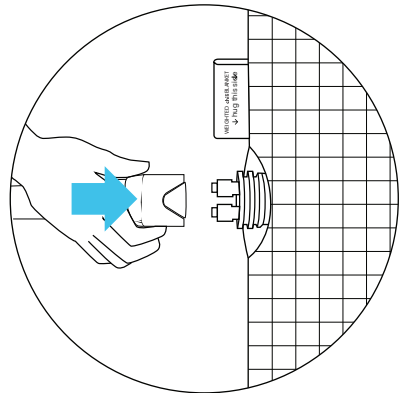


### 3. **CONNECT THE chiliBLANKET TO THE CONTROL UNIT**

Connect the opposite side of the tubing to the control unit. It should 'click' when connected.

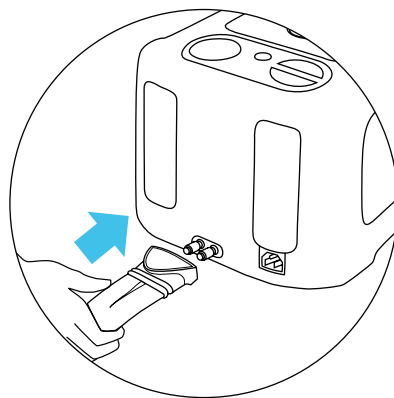

### 4. **CONNECT THE CONTROL UNIT TO THE POWER CORD.**


Plug the included power cord into the CONTROL UNIT, and then plug into a wall outlet. The CONTROL UNIT will be in standby power mode.

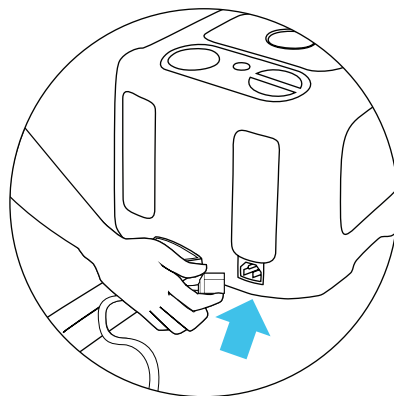

**5. FILL THE OOLER WITH WATER.**

Pour approximately 13oz (390ml) of water into the CONTROL UNIT and then press the power button.

The water will begin to circulate into the chiliBLANKET. Refill the CONTROL UNIT once the blanket has filled with water and the low water indicator light turns off.

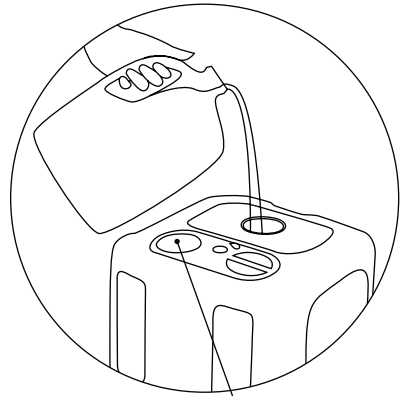

**6. FOR OPTIMAL PERFORMANCE**

Precool/Preheat the chiliBLANKET to your desired temperature for 30 minutes prior to use. Allow the blanket to lay flat as you get cozy, this will help efficiently circulate the water and regulate the temperature.

